


# Grease Interceptor

Above-ground installation. Required in commercial food preparation areas. The function of a grease trap is to slow the flow of warm/hot greasy water thus allowing it to cool. As the water cools, the grease and oil separate and float to the top, solids to settle on the bottom of the tank and the cleaner/cooler water flows out to sewer.

Capacity litres	Dimensions mm			
	A	B	C	D
100	600	400	400	600
150	700	470	470	670
200	800	500	500	700
250	900	530	530	730
250a	1200	530	400	600
300	1120	600	450	750
400	1220	600	550	850
500	1220	750	550	850
600	1220	750	660	960
750	1470	750	680	980
1000	1470	900	760	1060
1100	1470	900	830	1130
1500	2000	900	830	1130
2000	2200	900	1000	1300
2500	2800	900	1000	1300
3000	3000	1000	1000	1300
4000	3000	1350	1000	1300

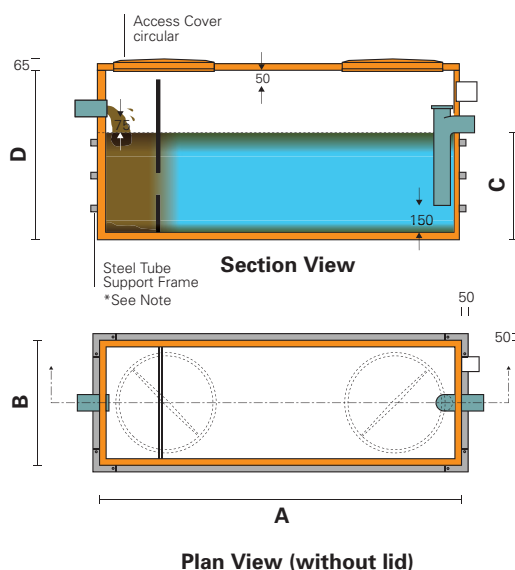

## Grease Interceptor model HP-1

For above-ground installations

- Manufactured from Polyethylene or Polypropylene – Paneltim®, this tank is suitable for above-ground installations only
- Standard tanks are fitted with 100mm nb. Inlet and Outlet pipe and 50mm Vent
- Circular screw-down access covers are fitted to a top lid that is screw fixed to the tank flange
- Tank dimensions and pipework positions are nominal and in all cases conform to Trade Waste recommendations
- When space limitations dictate, equivalent capacity tanks can be manufactured to order

*\*Note: Tanks larger than 250 litres capacity have external bracing fitted. Allow 50mm all round*

## Also available from Hugo Plastics

- Grease Interceptors for above and below-ground installations
- Mixing Tanks
- Settling Tanks
- Pump Tank
- Silt Pit
- Testing Sump
- Solvent and Oil Interceptor
- Petrol and Oil Interceptor
- Cooling and Straining Tank
- Custom Fabrication to order