

Solvent and Oil Interceptor


HUGO
PLASTICS

HP-10BG


Below-ground installation. Typically installed in a Screen Print workshop. This tank design contains and slows the flow of waste to allow any solvents and/or oil to float and separate from the cleaner water which flows out to sewer. Collected waste should be drained from the tank periodically and disposed as directed by local authorities.

Dimensions mm

Capacity litres	A	B	C	D
600	1400	750	570	970
1100	1900	600	1000	1400
2000	2900	900	770	1170

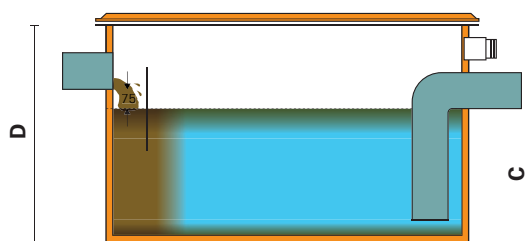

Section View

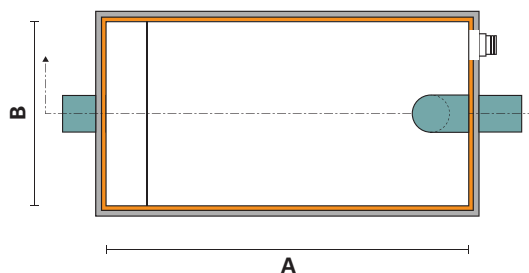

Plan View (without lid)

Solvent and Oil Interceptor model HP-10BG

- Manufactured from Polyethylene or Polypropylene – Paneltim®, this tank is suitable for use with dilute solutions of solvents, petrol and oils
- The tank must be surrounded with 100mm thick concrete walls and base
- Access covers (supplied separately) capable of being removed by one man should be fitted on top
- Tank dimensions and pipework positions are nominal and in all cases conform to Trade Waste recommendations
- When space limitations dictate, equivalent capacity tanks can be manufactured to order

Also available from Hugo Plastics

- Grease Interceptors for above and below-ground installations
- Mixing Tanks
- Settling Tanks
- Pump Tank
- Silt Pit
- Testing Sump
- Solvent and Oil Interceptor
- Petrol and Oil Interceptor
- Cooling and Straining Tank
- Custom Fabrication to order