

Cooling and Straining Tank


Used in commercial Laundromats. The function of a cooling and straining tank is to slow the flow of warm/hot waste water, thus allowing it to cool before flowing out to sewer. The primary tank chamber has a removable basket that traps lint and hair.

Capacity litres	Dimensions mm			
	A	B	C	D
Above-ground Polypropylene				
250	1000	600	450	800
400	1500	600	450	800
600	1500	750	550	900
1000	2000	750	650	1000
Below-ground Polypropylene				
250	12500	450	450	850
400	1400	600	500	900
600	1400	750	570	970
1000	1900	750	700	1100
1500	1900	900	900	1300
2000	2400	900	950	1350

Cooling and Straining Tank model HP-8

- Manufactured in Polyethylene or Polypropylene – Paneltim®.
- Above-ground tanks are supplied with removable access covers
- Below-ground tanks should be fitted with access covers (supplied separately) capable of being removed by one man
- Inlet and outlet pipes are 100mm nb.
- Tank dimensions and pipework positions are nominal and in all cases conform to Trade Waste recommendations
- When space limitations dictate, equivalent capacity tanks can be manufactured to order

**Note: Above-ground tanks larger than 250 litres capacity have external bracing fitted. Allow 50mm all round*

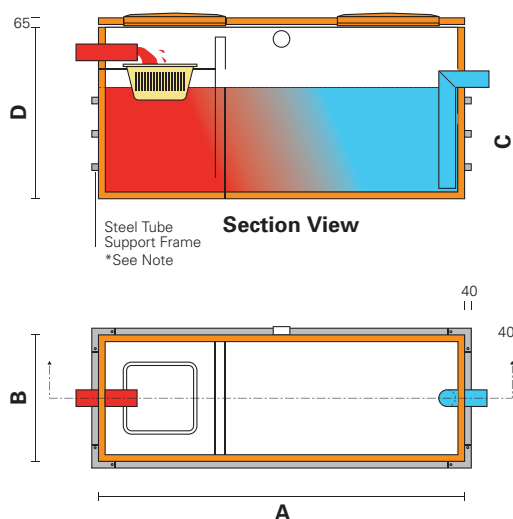

Also available from Hugo Plastics

- Grease Interceptors for above and below-ground installations
- Mixing Tanks
- Settling Tanks
- Pump Tank
- Silt Pit
- Testing Sump
- Solvent and Oil Interceptor
- Petrol and Oil Interceptor
- Cooling and Straining Tank
- Custom Fabrication to order